


REV.	REVISION	DATE

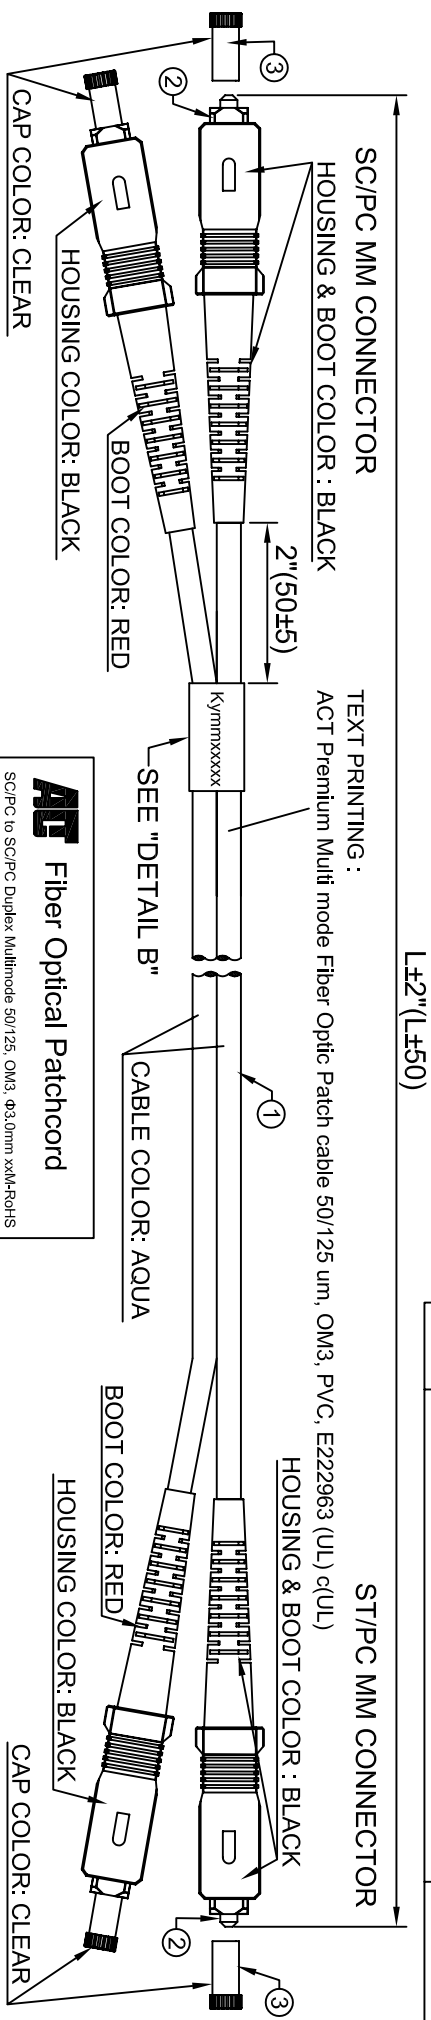

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG 5 CABLES	NONE
LARGE	POLYBAG ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON		

ATF Fiber Optical Patchcord

SC/PC to SC/PC Duplex Multimode 50/125, OM3, Ø3.0mm xXL-RoHS

Model: xxxxx -xxxxxx

Lot number: _____

Performance: (@23°C) A#850/1310±20nm

X X X X X X X X X X X X X X X X


Serial No

A	850nm	1310nm
B		
C		
D		

Insertion Loss ≤ 0.3dB


Prepared By: _____ Date: _____

DETAIL C



DETAIL B

Y: Year, mm: Month
xxxxx: Serial Number

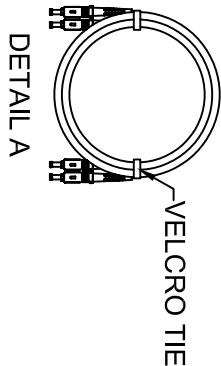

3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, AQUA JACKET.
ITEM	QTY	PART NO.	DESCRIPTION
PART LIST			

	UNIT: Inches[mm]	TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX 50/125, OM3, 3.0mm, AQUA
DRAWN BY Catherine	DATE 2008/3/3	CUSTOMER CUSTOMER PART NO.
CHECKED BY	DATE	RL36**
APPROVED BY	DATE	PK802001 Ref. NO. REV. A
SALE BY	DATE	TREINDEX PART NO.



CUSTOMER APPROVAL:			DATE:
PART NO.	**	xx	L
RL3650	50	50	164'(50000)
RL3630	30	30	98.4'(30000)
RL3620	20	20	65.6'(20000)
RL3615	15	15	49.2'(15000)
RL3610	10	10	32.8'(10000)
RL3605	05	5	16.4'(5000)
RL3603	03	3	9.84'(3000)
RL3602	02	2	6.56'(2000)
RL3651	51	1.5	4.92'(1500)
RL3601	01	1	3.28'(1000)
DESCRIPTION 1	DESCRIPTION 2	DESCRIPTION 1	DESCRIPTION 2